



CONDENSADORAS HEAT PUMP

It's Hard To Stop A Trane.®

1 — 5 Ton
2TWB0012 - 060A

***XB 10 Weathertron®
Split System
Heat Pump***

Specifications: 1 Phase

Model Number	Power Supply	Nom. Cap. Cooling (BTUH)
2TWB0012A1000B	200/230/1/60	12,000
2TWB0018A1000B	200/230/1/60	18,000
2TWB0024A1000B	200/230/1/60	24,000
2TWB0030A1000B	200/230/1/60	30,000
2TWB0036A1000B	200/230/1/60	36,000
2TWB0042A1000B	200/230/1/60	42,000
2TWB0048A1000B	200/230/1/60	48,000
2TWB0060A1000B	200/230/1/60	60,000

Features:

- Climatuff® compressor
- All aluminum Spine Fin™ coil
- DuraTuff™ base, fast complete drain, weather proof
- New appearance with polystate gray cabinet
- Quick-Sess™ cabinet, service access and refrigerant connections with full coil protection
- Corrosion resistant finish and fasteners

- Internal high/low pressure & temperature protection
- Liquid line filter-drier
- Easy single side service
- Multi-use liquid and suction line service valves
- Compressor sump heat
- Easy top & fan removal
- HCFC-22 refrigerant

- 5 Year limited warranty on compressor, coil, and 1 year on parts
- S.E.E.T. design testing
- 100% line run test
- Low ambient cooling to 55°F as shipped
- Low ambient cooling to 40°F with EDC accessory AY28X084
- Low ambient cooling to 30°F with EDC accessory AY28X084 and TXV





CONDENSADORAS HEAT PUMP

It's Hard To Stop A Trane.®

1-1/2 — 5 Ton
2TWB3018 - 060A

***XB 13 Weathertron®
Split System
Heat Pump***

Specifications: 1 Phase

Model Number	Power Supply	Nom. Cap. Cooling (BTUH)
2TWB3018A1000A	200/230/1/60	17,000
2TWB3024A1000A	200/230/1/60	23,000
2TWB3030A1000A	200/230/1/60	28,500
2TWB3036A1000A	200/230/1/60	34,500
2TWB3042A1000A	200/230/1/60	40,500
2TWB3048A1000A	200/230/1/60	46,500
2TWB3060A1000A	208/230/1/60	58,500

Features:

- **Climatuff®** compressor
- Efficiency up to 13.25 SEER and 8.0 HSPF
- All aluminum **Spine Fin™** coil
- **WeatherGuard™** fasteners
- **Quick-Sess™** cabinet, service access and refrigerant connections with full coil protection
- **DuraTuff™** base, fast complete drain, weather proof
- **Comfort-R™** mode approved
- Glossy corrosion resistant finish
- Internal compressor high/low pressure & temperature protection
- Start Kit standard
- Compressor sump heat
- Liquid line filter-drier
- Polyslate gray cabinet with anthracite gray badge & cap
- Low Pressure Switch
- Demand Defrost Control with diagnostics
- R-22 refrigerant
- **5-year limited warranty on compressor, coil, and 5-years on internal functional parts (Residential Use)**
- **Extended warranties available**
- S.E.E.T. design testing
- 100% line run test
- Low ambient cooling to 55°F as shipped
- Low ambient cooling to 30°F with AY28X084V
- Low ambient cooling to 0°F with BAYLOAM103





CONDENSADORAS HEAT PUMP

It's Hard To Stop A Trane.®

1-1/2 — 5 Ton
4TWB3018 - 060A

***XB 13 Weathertron®
Split System
Heat Pump***

R-410

Specifications: 1 Phase

Model Number	Power Supply	Nom. Cap. Cooling (BTUH)
4TWB3018A1000A	200/230/1/60	17,000
4TWB3024A1000A	200/230/1/60	23,000
4TWB3030A1000A	200/230/1/60	28,500
4TWB3036A1000A	208/230/1/60	34,500
4TWB3042A1000A	208/230/1/60	40,500
4TWB3048A1000A	208/230/1/60	46,500
4TWB3060A1000A	208/230/1/60	58,500

Features:

- **Climatuff®** compressor
- Efficiency up to 13.25 SEER and 8.0 HSPF
- All aluminum **Spine Fin™** coil
- **WeatherGuard™** fasteners
- **Quick-Sess™** cabinet, service access and refrigerant connections with full coil protection
- **DuraTuff™** base, fast complete drain, weather proof
- **Comfort-R™** mode approved
- Glossy corrosion resistant finish
- Internal compressor high/low pressure & temperature protection
- 018,024,030 & 060 ship with Start Kit
- Liquid line filter-drier
- Polyslate gray cabinet with anthracite gray badge & cap
- Low Pressure Switch
- Demand Defrost Control with diagnostics
- High pressure switch
- Compressor sump heat
- R-410A refrigerant
- **5-year limited warranty on compressor, coil, and 5-years on internal functional parts (Residential Use)**
- **Extended warranties available**
- S.E.E.T. design testing
- 100% line run test
- Low ambient cooling to 55°F as shipped
- Low ambient cooling to 30°F with AY28X084
- Low ambient cooling to 0°F with BAYLOAM103





CONDENSADORAS HEAT PUMP

It's Hard To Stop A Trane.®

1-1/2 — 5 Ton
4TWR4018 - 060C

**XR 14 Weathertron®
Split System
Heat Pump**

R-410

Specifications: 1 Phase

Model Number	Power Supply	Nom. Cap. Cooling (BTUH)
4TWR4018C1000A	200/230/1/60	18,000
4TWR4024C1000A	200/230/1/60	24,000
4TWR4030C1000A	200/230/1/60	30,000
4TWR4036C1000A	208/230/1/60	36,000
4TWR4042C1000A	208/230/1/60	42,000
4TWR4048C1000A	208/230/1/60	48,000
4TWR4060C1000A	208/230/1/60	60,000

Features:

- **Climatuff®** compressor
- Efficiency up to 14.00 SEER and 9.0 HSPF
- All aluminum **Spine Fin™** coil
- **WeatherGuard™** fasteners
- **Quick-Sess™** cabinet, service access and refrigerant connections with full coil protection
- **DuraTuff™** base, fast complete drain, weather proof
- **Comfort-R™** mode approved
- Glossy corrosion resistant finish
- Internal compressor high/low pressure & temperature protection
- 018, 024 & 030 ship with start kit
- Compressor sump heat
- Liquid line filter-drier
- Tarpaulin gray cabinet with anthracite gray badge & cap
- High pressure switch
- Demand Defrost Control with diagnostics
- Service valve cover
- R-410A refrigerant
- **10-year limited warranty on compressor, coil, 5-years internal functional parts (Residential Use)**
- **Extended warranties available**
- S.E.E.T. design testing
- 100% line run test
- Low ambient to 30°F with AY28X084
- Low ambient cooling to 55°F as shipped





CONDENSADORAS HEAT PUMP

It's Hard To Stop A Trane.®

2-1/2, 3, 4, 5 Ton
2TWZ9030 - 060C

XL19i
Split System
Weathertron®
Heat Pumps

Specifications: 1 Phase

Model Number	Power Supply	Nom. Cap. Cooling (BTUH)
2TWZ9030C1000A	200/230/1/60	30,000
2TWZ9036C1000A	200/230/1/60	36,000
2TWZ9048C1000A	200/230/1/60	48,000
2TWZ9060C1000A	200/230/1/60	60,000

Features:

- Two **Climatuff®** compressors
- Efficiency up to **17.90 SEER** and **8.8 HSPF**
- All Aluminum **Spine Fin™** coil
- **WeatherGuard™ II** top shields unit
- **WeatherGuard™** fasteners
- **Quick-Sess™** cabinet, service access and refrigerant connections with full coil protection
- **DuraTuff™** base, fast complete drain, weather proof
- **Comfort "R"™** mode approved
- **ComfortLink™ II** System only two wire control connection
- **Charge Assist™** fast/accurate charging every time
- Glossy corrosion resistant finish
- Internal compressor high/low pressure & temperature protection
- Start kit standard
- 50 or 100% capacity modulation
- Compressor sump heat
- Electronic compressor control
- Liquid line filter/drier
- Tarpaulin gray cabinet with anthracite gray top
- Low sound with advanced fan system and compressor sound insulator
- Variable speed fan motor
- Demand defrost control with diagnostics
- XL Seacoast shield
- Service valve cover
- R-22 refrigerant
- **10-year limited warranty on compressor, coil, and internal functional parts (Residential Use)**
- **Extended warranties available**
- S.E.E.T. design testing
- 100% line run test
- Low ambient cooling to 55°F as shipped



2-1/2 — 6 Ton
2TWA0030 - 072

**Weathertron®
Split System
Heat Pump
Three Phase**

Specifications: 3 Phase

Model® Number	Power Supply	Nom. Cap. Cooling (BTUH)
2TWA0030A3000A	200-230/3/60	30,000
2TWA0036A3000A	200-230/3/60	36,000
2TWA0042A3000A	200-230/3/60	42,000
2TWA0048A3000A	200-230/3/60	48,000
2TWA0060A3000A	200-230/3/60	60,000
2TWA0072A3000A	200-230/3/60	72,000
2TWA0030A4000A	460/3/60	30,000
2TWA0036A4000A	460/3/60	36,000
2TWA0042A4000A	460/3/60	42,000
2TWA0048A4000A	460/3/60	48,000
2TWA0060A4000A	460/3/60	60,000
2TWA0072A4000A	460/3/60	72,000

Features:

- Climatuff® compressor
- All aluminum Spine Fin™ coil
- DuraTuff™ base, fast complete drain, weatherproof
- WeatherGuard™ fasteners
- New appearance with polyslate gray cabinet
- Quick-Sess™ cabinet, service access and refrigerant connections with full coil protection
- Demand Defrost Control with Diagnostics
- Corrosion resistant finish
- Internal high/low pressure & temperature protection
- Low pressure switch
- Liquid line filter-drier
- Comfort"R"™ mode approved
- Compressor sump heat
- Easy single side service
- Multi-use liquid and suction line service valves
- Easy top & fan removal
- HCFC-22 refrigerant
- 5 Year limited warranty on compressor, coil, and 1 year on parts
- S.E.E.T. design testing
- 100% line run test
- Low ambient cooling to 55°F as shipped
- Low ambient cooling to 40°F with EDC accessory AY28X084
- Low ambient cooling to 30°F with EDC accessory AY28X084 and TXV
- Low ambient cooling to 0°F with TXV and BAYLOAM103





CONDENSADORAS HEAT PUMP

2-1/2 — 5 Ton
2TWA3030 - 060

**Weathertron®
Split System
Heat Pump
Three Phase**

Specifications: 3 Phase

Model Number	Power Supply	Nom. Cap. Cooling (BTUH)
2TWA3030A3000A	200-230/3/60	30,000
2TWA3036A3000A	200-230/3/60	36,000
2TWA3042A3000A	200-230/3/60	42,000
2TWA3048A3000A	200-230/3/60	48,000
2TWA3060A3000A	200-230/3/60	60,000
<hr/>		
2TWA3030A4000A	460/3/60	30,000
2TWA3036A4000A	460/3/60	36,000
2TWA3042A4000A	460/3/60	42,000
2TWA3048A4000A	460/3/60	48,000
2TWA3060A4000A	460/3/60	60,000

Features:

- Climatuff® compressor
- All aluminum **Spine Fin™** coil
- **WeatherGuard™** fasteners
- **Quick-Sess™** cabinet, service access and refrigerant connections with full coil protection
- **DuraTuff™** base, fast complete drain, weatherproof
- **Comfort-R™** mode approved
- Glossy corrosion resistant finish
- Internal compressor high/low pressure & temperature protection
- Compressor sump heat
- Liquid line filter-drier
- Polyslate gray cabinet with anthracite gray badge & cap
- Low pressure switch
- Demand Defrost Control with diagnostics
- R-22 refrigerant
- **5-year limited warranty on compressor, coil, and internal functional parts (Residential Use Only)**
- **5-year limited warranty on compressor, coil, and 1-year on parts (Commercial Use Only)**
- **Extended warranties available**
- S.E.E.T. design testing
- 100% line run test
- Low ambient cooling to 55°F as shipped
- Low ambient cooling to 30°F with AY28X084
- Low ambient cooling to 0°F with BAYLOAM103



2-1/2 — 5 Ton
4TWA3030 - 060

Weathertron®
Split System
Heat Pump
Three Phase


R-410

Specifications: 3 Phase

Model Number	Power Supply	Nom. Cap. Cooling (BTUH)
4TWA3030A3000A	200-230/3/60	30,000
4TWA3036A3000A	200-230/3/60	36,000
4TWA3042A3000A	200-230/3/60	42,000
4TWA3048A3000A	200-230/3/60	48,000
4TWA3060A3000A	200-230/3/60	60,000
<hr/>		
4TWA3030A4000A	460/3/60	30,000
4TWA3036A4000A	460/3/60	36,000
4TWA3042A4000A	460/3/60	42,000
4TWA3048A4000A	460/3/60	48,000
4TWA3060A4000A	460/3/60	60,000

Features:

- **Climatuff®** compressor
- All aluminum **Spine Fin™** coil
- **WeatherGuard™** fasteners
- **Quick-Sess™** cabinet, service access and refrigerant connections with full coil protection
- **DuraTuff™** base, fast complete drain, weatherproof
- **Comfort-R™** mode approved
- Corrosion resistant finish
- Internal compressor high/low pressure & temperature protection
- Compressor sump heat
- Liquid line filter-drier
- Polyslate gray cabinet with anthracite gray badge & cap
- Low pressure switch
- High pressure switch
- Demand Defrost Control with diagnostics
- R-410A refrigerant
- **5-year limited warranty on compressor, coil, and internal functional parts (Residential Use Only)**
- **5-year limited warranty on compressor, coil, and 1-year on parts (Commercial Use Only)**
- **Extended warranties available**
- S.E.E.T. design testing
- 100% line run test
- Low ambient cooling to 55°F as shipped
- Low ambient cooling to 30°F with AY28X084
- Low ambient cooling to 0°F with BAYLOAM103

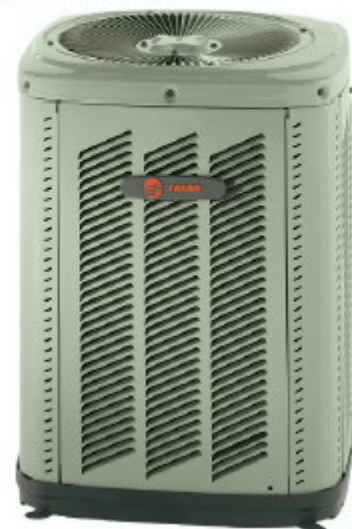

CONDENSADORAS HEAT PUMP

7-1/2 — 10 Ton
TWA090 - 120A

*Split System
Heat Pump*

Specifications:

Model Number	Factory Installed Option	Power Supply	Capacity Cooling (BTUH)
TWA090A300F	—	208-230/3/60	91,000
TWA090A30SF	Epoxy Coil	208-230/3/60	91,000
TWA120A300F	—	208-230/3/60	124,000
TWA120A30SF	Epoxy Coil	208-230/3/60	124,000
TWA090A400F	—	460/3/60	91,000
TWA090A40SF	Epoxy Coil	460/3/60	91,000
TWA120A400F	—	460/3/60	124,000
TWA120A40SF	Epoxy Coil	460/3/60	124,000





CONDENSADORAS HEAT PUMP

It's Hard To Stop A Trane.®

15 — 20 Ton
TWA180 - 240B

**Split System
Heat Pump**

Specifications:

Features:

- (2) Trane 3-D® Scroll compressors
- Compressor motor overload protection
- Control Transformer
- High and low pressure cut out switches
- Liquid line filter drier, factory installed
- Service valves with pressure taps
- Thermostatic expansion valve
- Solenoid operated switchover valve
- Holding charge of Nitrogen
- Copper tube, aluminum plate fin coils
- Electronic time and temperature defrost control
- Low Ambient cooling to 50°F as manufactured
- Low Ambient cooling to 0°F with accessory head pressure control
- Heavy gauge steel cabinet
- Weather resistant baked enamel finish
- Mounting/lifting rails under base
- Optional factory installed Black Epoxy Coil for corrosion resistance
- UL listed
- **Compressor warranty for TWA180B is 5-years**
- **Standard compressor warranty for TWA240B is 1-year**



